


TaskLaunch

Preparare una barra simile alla seguente:

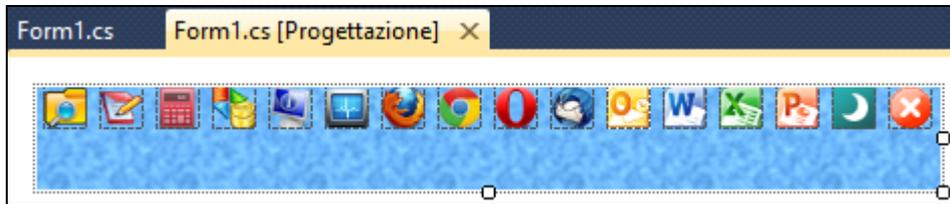

sono pictureBox

Poi preparare il seguente codice:

```
using System;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Drawing;
using System.Linq;
using System.Text;
using System.Windows.Forms;

namespace LaunchTaskBar
{
    public partial class Form1 : Form
    {
        PictureBox bkgnd = new PictureBox();

        public Form1()
        {
            InitializeComponent();
        }

        private void Form1_Load(object sender, EventArgs e)
        {
            int dim = Screen.PrimaryScreen.Bounds.Width;
            dim = dim - this.Width;
            this.Left = dim;
            this.Top = 0;
            this.Height = 22;
            this.Opacity = 1.00;
            this.TopLevel = true;
            this.TopMost = true;
            bkgnd.Image = this.BackgroundImage;
        }

        private void pb_filemgr_Click(object sender, EventArgs e)
        {
            //file manager
            try
            {
                System.Diagnostics.Process proc = new System.Diagnostics.Process();
                proc.EnableRaisingEvents = false;
                proc.StartInfo.FileName = @"explorer";
                proc.Start();
            }
            catch (Exception)
            {
                MessageBox.Show("Comando fallito");
            }
        }
    }
}
```

```
private void pb_notepad_Click(object sender, EventArgs e)
{
    //blocco note
    try
    {
        System.Diagnostics.Process proc = new System.Diagnostics.Process();
        proc.EnableRaisingEvents = false;
        proc.StartInfo.FileName = @"notepad";
        proc.Start();
    }
    catch (Exception)
    {
        MessageBox.Show("Comando fallito");
    }
}

private void pb_calculator_Click(object sender, EventArgs e)
{
    //calcolatrice
    try
    {
        System.Diagnostics.Process proc = new System.Diagnostics.Process();
        proc.EnableRaisingEvents = false;
        proc.StartInfo.FileName = @"calc";
        proc.Start();
    }
    catch (Exception)
    {
        MessageBox.Show("Comando fallito");
    }
}

private void pb_exit_Click(object sender, EventArgs e)
{
    //exit
    Close();
}

private void pb_firefox_Click(object sender, EventArgs e)
{
    //launch firefox browser
    try
    {
        System.Diagnostics.Process proc = new System.Diagnostics.Process();
        proc.EnableRaisingEvents = false;
        proc.StartInfo.FileName = @"firefox";
    }
}
```